

TX Comfort



Decentralized ventilation - room by room

Balanced ventilation

Heat Recovery

Low noise

Low energy consumption

Easy installation





TURBOVEX 
- Fresh air for everyone

+45 96 98 14 62 www.turbovex.dk

TX Comfort



TECHNICAL SPECIFICATIONS

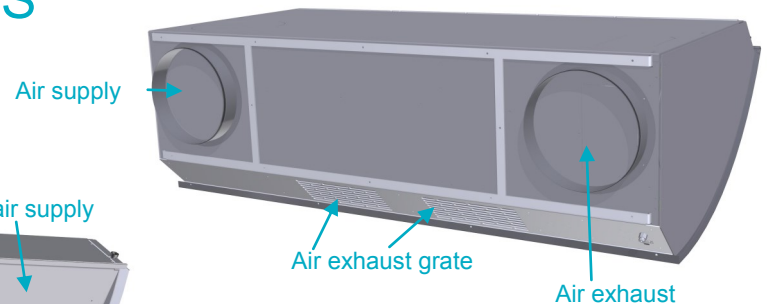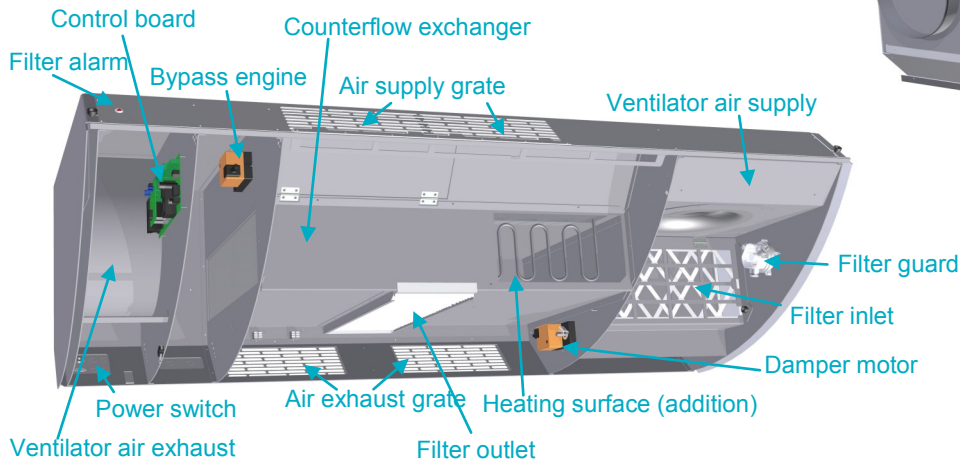

	TX 250A	TX 500A	TX 750A	TX 1000A
Dimensions L x D x H:	1200x595x403mm	1550x828x493mm	1800x895x565mm	2100x1050x665mm
Capacity 30 db(A):	200 m³/h	425 m³/h	600 m³/h	700 m³/h
Temperatur efficiency:*	84,2 % v/ 200m³/h	86,8 % v/ 425m³/h	82,0 % v/ 600m³/h	88,0 % v/700m³/h
Capacity 35 db(A):	250 m³/h	500 m³/h	750 m³/h	1000 m³/h
Temperatur efficiency:*	80,6 % v/ 250m³/h	84,5 % v/ 500m³/h	78,0 % v/ 750m³/h	80,6 % v/1000m³/h
Filter (standard):	ePM10≥50%	ePM10≥50%	ePM10≥50%	ePM10≥50%
Filter (option):	ePM1≥55%	ePM1≥55%	ePM1≥55%	ePM1≥55%
Weight:	35 kg	57 kg	99 kg	22 kg
Electric power connection:	1 ~ 230 V/50Hz	1 ~ 230 V/50Hz	1 ~ 230 V/50Hz	1 ~ 230 V/50Hz
Max. power consumption	1,2 A	1,5 A	2,2 A	2,5 A
Leakage Current:	≤7 mA	≤7 mA	≤7 mA	≤7 mA
Power cable:	3G1,5 mm²	3G1,5 mm²	3G1,5 mm²	3G1,5 mm²
Throw(0,2 m/s):	8 m	10 m	12 m	15 m
Energy consumption v/35 db(A):	28 W – 403 J/m³	65 W – 468 J/m³	78 W – 375 J/m³	150 W – 540 J/m³
Electric reheater (option):	400 W	650 W	1000 W	1250 W
Water reheater (option):	340 W	670 W	1260 W	1340 W
Duct connection:	2 x Ø 160	2 x Ø 250	2 x Ø 315	2 x Ø 315
Heat exchanger:	Counter flow (Al)	Counter flow (Al)	Counter flow (Al)	Counter flow (Al)
Color (standard):	RAL 9010	RAL 9010	RAL 9010	RAL 9010
Condensate drain (option):	Ø16 x Ø20 mm	Ø16 x Ø20 mm	Ø16 x Ø20 mm	Ø16 x Ø20 mm
Condensate drain with pump (option):	Ø6 x Ø8 mm	Ø6 x Ø8 mm	Ø6 x Ø8 mm	Ø6 x Ø8 mm